


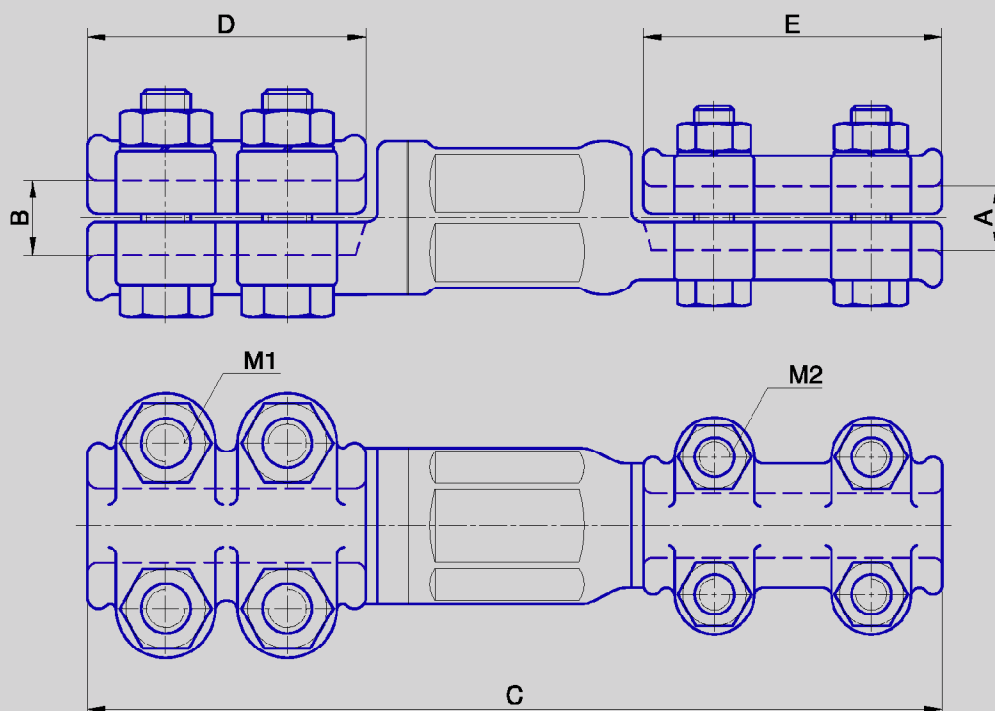

| Kataloški broj<br><i>Catalogue No.</i> | Prečnik - <i>Diameter</i>     |                                       | Dimenzije - <i>Dimensions</i> |      |      |      |      | Težina<br><i>Weight</i> |
|----------------------------------------|-------------------------------|---------------------------------------|-------------------------------|------|------|------|------|-------------------------|
|                                        | Provodnik<br><i>Conductor</i> | Bolcn ili cev<br><i>Rivet or tube</i> | C                             | D    | E    | M1   | M2   |                         |
|                                        | A (mm)                        | B (mm)                                | (mm)                          | (mm) | (mm) | (mm) | (mm) | (≈kg)                   |
| C11 6 10                               | 5 – 8                         | 5 – 10                                | 120                           | 40   | 40   | M6   | M6   | 0,800                   |
| C11 6 20                               | 5 – 8                         | 10 – 20                               | 120                           | 40   | 40   | M8   | M6   | 1,000                   |
| C11 10 10                              | 8 – 11                        | 5 – 10                                | 150                           | 50   | 50   | M6   | M6   | 1,200                   |
| C11 10 20                              | 8 – 11                        | 10 – 20                               | 150                           | 50   | 50   | M8   | M6   | 1,400                   |
| C11 12 20                              | 11 – 14                       | 10 – 20                               | 180                           | 60   | 60   | M10  | M8   | 1,800                   |
| C11 12 30                              | 11 – 14                       | 20 – 30                               | 180                           | 60   | 60   | M10  | M8   | 2,000                   |
| C11 15 20                              | 14 – 17                       | 10 – 20                               | 210                           | 70   | 70   | M10  | M10  | 2,400                   |
| C11 15 30                              | 14 – 17                       | 20 – 30                               | 210                           | 70   | 70   | M10  | M10  | 2,600                   |
| C11 18 20                              | 17 – 20                       | 10 – 20                               | 240                           | 80   | 80   | M10  | M10  | 3,000                   |

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

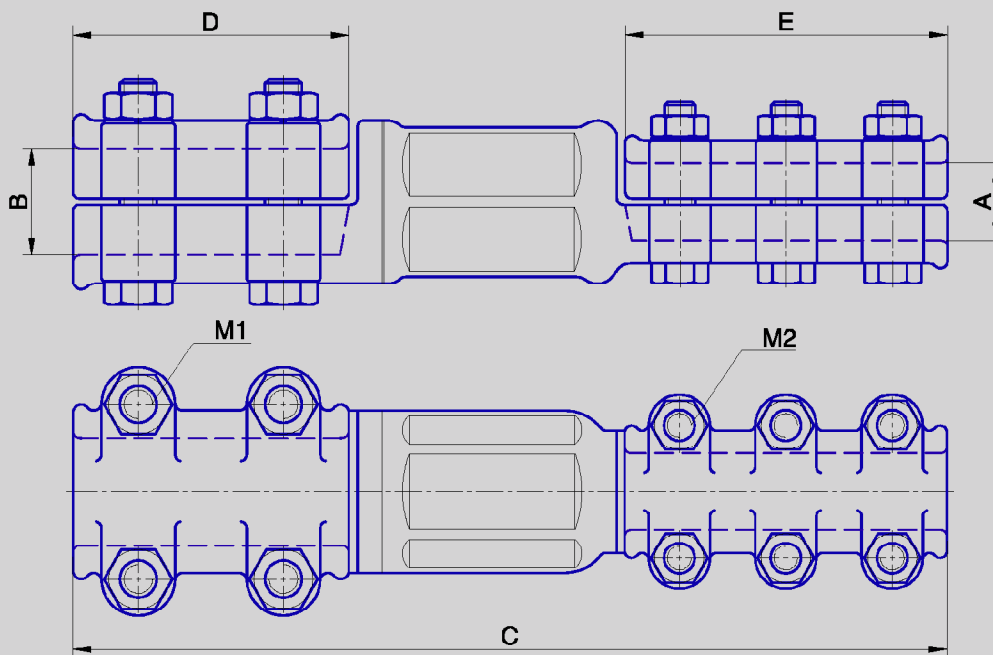

| Kataloški broj<br>Catalogue No. | Prečnik - Diameter     |                                | Dimenzije - Dimensions |      |      |      |      | Težina<br>Weight |
|---------------------------------|------------------------|--------------------------------|------------------------|------|------|------|------|------------------|
|                                 | Provodnik<br>Conductor | Bolcn ili cev<br>Rivet or tube | C                      | D    | E    | M1   | M2   |                  |
|                                 | A (mm)                 | B (mm)                         | (mm)                   | (mm) | (mm) | (mm) | (mm) | (≈kg)            |
| C11 18 30                       | 17 – 20                | 20 – 30                        | 250                    | 80   | 90   | M10  | M10  | 3,200            |
| C11 18 40                       | 17 – 20                | 30 – 40                        | 250                    | 80   | 90   | M12  | M10  | 3,400            |
| C11 22 30                       | 20 – 23                | 20 – 30                        | 285                    | 90   | 105  | M10  | M10  | 3,700            |
| C11 22 40                       | 20 – 23                | 30 – 40                        | 285                    | 90   | 105  | M12  | M10  | 3,900            |
| C11 25 30                       | 23 – 26                | 20 – 30                        | 285                    | 90   | 105  | M12  | M10  | 4,200            |
| C11 25 40                       | 23 – 26                | 30 – 40                        | 285                    | 90   | 105  | M12  | M10  | 4,400            |
| C11 27 30                       | 26 – 29                | 20 – 30                        | 320                    | 100  | 120  | M12  | M12  | 4,800            |
| C11 27 40                       | 26 – 29                | 30 – 40                        | 320                    | 100  | 120  | M12  | M12  | 5,000            |
| C11 30 30                       | 29 – 32                | 20 – 30                        | 335                    | 100  | 135  | M12  | M12  | 5,400            |
| C11 30 40                       | 29 – 32                | 30 – 40                        | 335                    | 100  | 135  | M12  | M12  | 5,700            |
| C11 30 50                       | 29 – 32                | 40 – 50                        | 335                    | 100  | 135  | M12  | M12  | 6,000            |

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

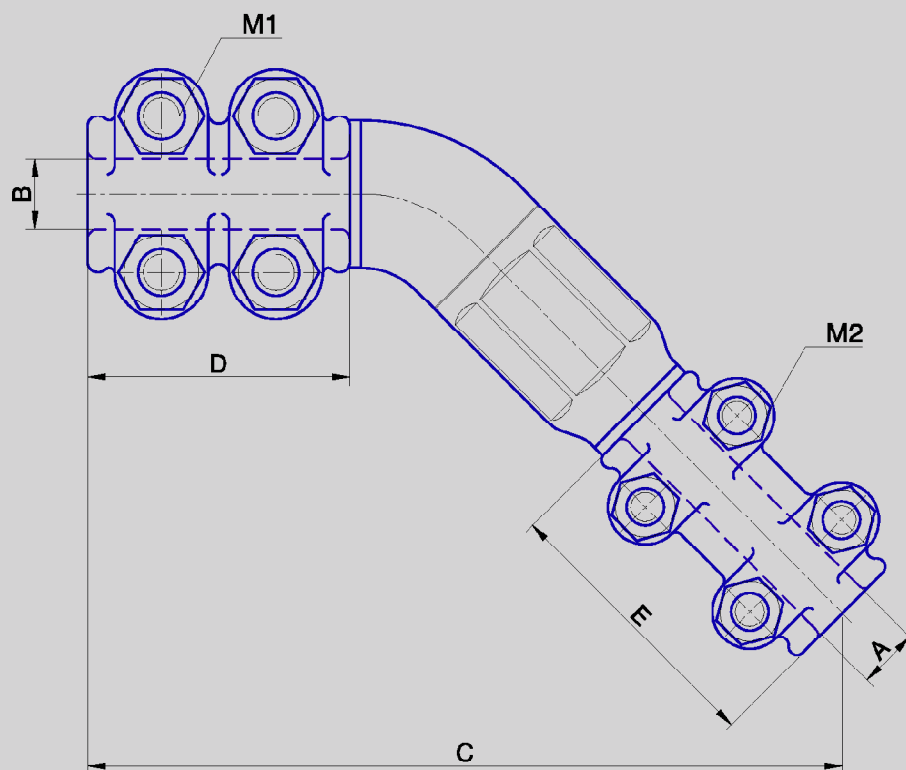

| Kataloški broj<br>Catalogue No. | Prečnik - Diameter     |                                | Dimenzije - Dimensions |      |      |      |      | Težina<br>Weight |
|---------------------------------|------------------------|--------------------------------|------------------------|------|------|------|------|------------------|
|                                 | Provodnik<br>Conductor | Bolcn ili cev<br>Rivet or tube | C                      | D    | E    | M1   | M2   |                  |
|                                 | A (mm)                 | B (mm)                         | (mm)                   | (mm) | (mm) | (mm) | (mm) | (≈kg)            |
| C12 6 10                        | 5 – 8                  | 5 – 10                         | 120                    | 40   | 40   | M6   | M6   | 0,900            |
| C12 6 20                        | 5 – 8                  | 10 – 20                        | 130                    | 40   | 40   | M8   | M6   | 1,100            |
| C12 10 10                       | 8 – 11                 | 5 – 10                         | 145                    | 50   | 50   | M6   | M6   | 1,360            |
| C12 10 20                       | 8 – 11                 | 10 – 20                        | 155                    | 50   | 50   | M8   | M6   | 1,540            |
| C12 12 20                       | 11 – 14                | 10 – 20                        | 180                    | 60   | 60   | M10  | M8   | 1,960            |
| C12 12 30                       | 11 – 14                | 20 – 30                        | 190                    | 60   | 60   | M10  | M8   | 2,300            |
| C12 15 20                       | 14 – 17                | 10 – 20                        | 205                    | 70   | 70   | M10  | M10  | 2,700            |
| C12 15 30                       | 14 – 17                | 20 – 30                        | 215                    | 70   | 70   | M10  | M10  | 2,900            |
| C12 18 20                       | 17 – 20                | 10 – 20                        | 230                    | 80   | 80   | M10  | M10  | 3,360            |

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

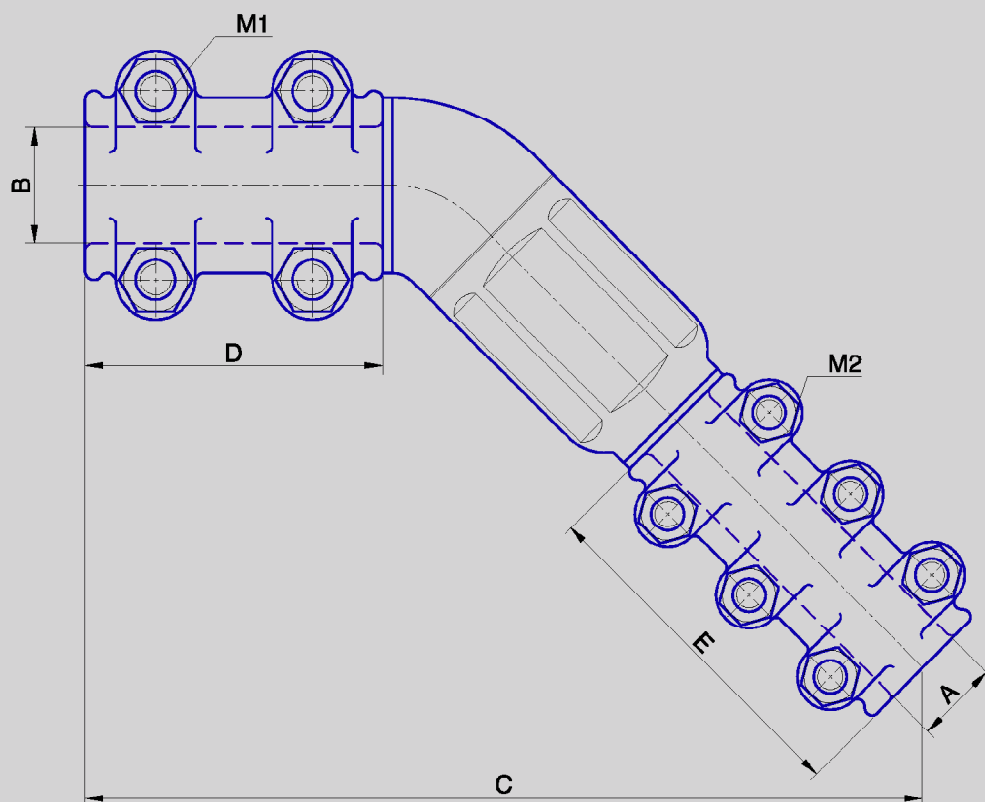

| Kataloški broj<br>Catalogue No. | Prečnik - Diameter     |                                | Dimenzije - Dimensions |      |      |      |      | Težina<br>Weight |
|---------------------------------|------------------------|--------------------------------|------------------------|------|------|------|------|------------------|
|                                 | Provodnik<br>Conductor | Bolcn ili cev<br>Rivet or tube | C                      | D    | E    | M1   | M2   |                  |
|                                 | A (mm)                 | B (mm)                         | (mm)                   | (mm) | (mm) | (mm) | (mm) | (≈kg)            |
| C12 18 30                       | 17 – 20                | 20 – 30                        | 235                    | 80   | 90   | M10  | M10  | 3,400            |
| C12 18 40                       | 17 – 20                | 30 – 40                        | 240                    | 80   | 90   | M12  | M10  | 3,600            |
| C12 22 30                       | 20 – 23                | 20 – 30                        | 260                    | 90   | 105  | M10  | M10  | 3,900            |
| C12 22 40                       | 20 – 23                | 30 – 40                        | 265                    | 90   | 105  | M12  | M10  | 4,200            |
| C12 25 30                       | 23 – 26                | 20 – 30                        | 260                    | 90   | 105  | M12  | M10  | 4,400            |
| C12 25 40                       | 23 – 26                | 30 – 40                        | 265                    | 90   | 105  | M12  | M10  | 4,600            |
| C12 27 30                       | 26 – 29                | 20 – 30                        | 280                    | 100  | 120  | M12  | M12  | 4,800            |
| C12 27 40                       | 26 – 29                | 30 – 40                        | 290                    | 100  | 120  | M12  | M12  | 5,200            |
| C12 30 30                       | 29 – 32                | 20 – 30                        | 310                    | 100  | 135  | M12  | M12  | 5,600            |
| C12 30 40                       | 29 – 32                | 30 – 40                        | 315                    | 100  | 135  | M12  | M12  | 5,800            |
| C12 30 50                       | 29 – 32                | 40 – 50                        | 320                    | 100  | 135  | M12  | M12  | 6,200            |

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

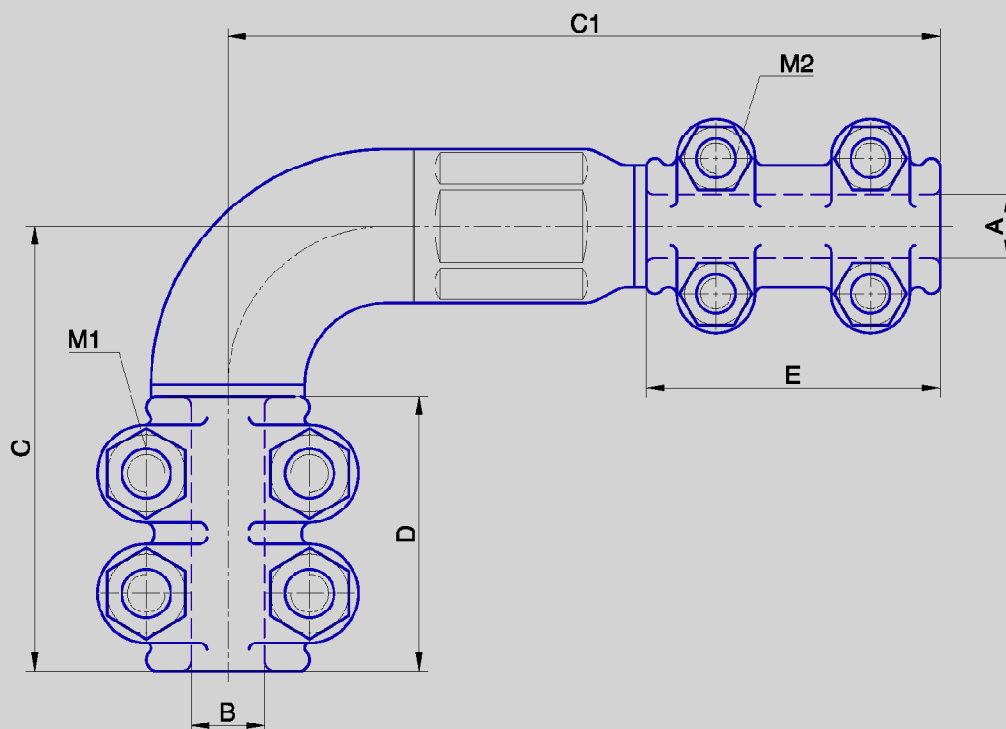

| Kataloški broj<br><i>Catalogue No.</i> | Prečnik - <i>Diameter</i>     |                                       | Dimenzije - <i>Dimensions</i> |      |      |      |      |      | Težina<br><i>Weight</i> |
|----------------------------------------|-------------------------------|---------------------------------------|-------------------------------|------|------|------|------|------|-------------------------|
|                                        | Provodnik<br><i>Conductor</i> | Bolcn ili cev<br><i>Rivet or tube</i> | C                             | C1   | D    | E    | M1   | M2   |                         |
|                                        | A (mm)                        | B (mm)                                | (mm)                          | (mm) | (mm) | (mm) | (mm) | (mm) | (≈kg)                   |
| C13 6 10                               | 5 – 8                         | 5 – 10                                | 70                            | 110  | 40   | 40   | M6   | M6   | 0,960                   |
| C13 6 20                               | 5 – 8                         | 10 – 20                               | 70                            | 115  | 40   | 40   | M8   | M6   | 1,200                   |
| C13 10 10                              | 8 – 11                        | 5 – 10                                | 80                            | 130  | 50   | 50   | M6   | M6   | 1,440                   |
| C13 10 20                              | 8 – 11                        | 10 – 20                               | 80                            | 135  | 50   | 50   | M8   | M6   | 1,680                   |
| C13 12 20                              | 11 – 14                       | 10 – 20                               | 85                            | 155  | 60   | 60   | M10  | M8   | 2,160                   |
| C13 12 30                              | 11 – 14                       | 20 – 30                               | 85                            | 165  | 60   | 60   | M10  | M8   | 2,400                   |
| C13 15 20                              | 14 – 17                       | 10 – 20                               | 100                           | 180  | 70   | 70   | M10  | M10  | 2,880                   |
| C13 15 30                              | 14 – 17                       | 20 – 30                               | 100                           | 185  | 70   | 70   | M10  | M10  | 3,120                   |
| C13 18 20                              | 17 – 20                       | 10 – 20                               | 100                           | 200  | 80   | 80   | M10  | M10  | 3,600                   |

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

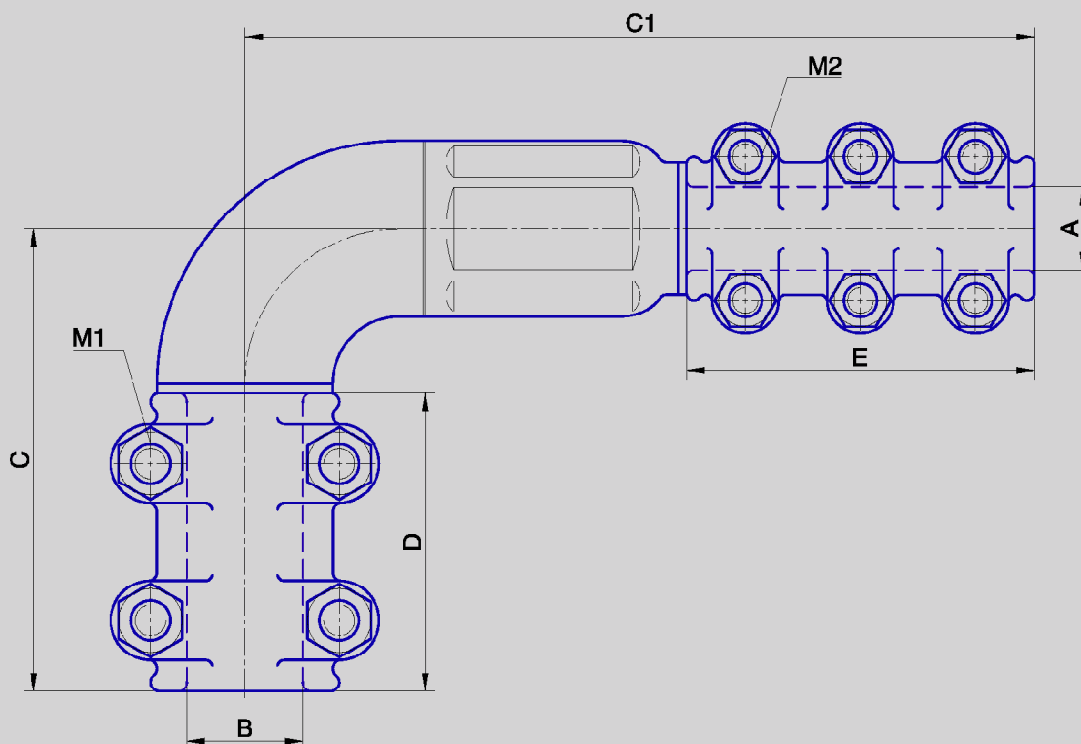

| Kataloški broj<br>Catalogue No. | Prečnik - Diameter               |                                          | Dimenzije - Dimensions |            |           |           |            |            | Težina<br>Weight |
|---------------------------------|----------------------------------|------------------------------------------|------------------------|------------|-----------|-----------|------------|------------|------------------|
|                                 | Provodnik<br>Conductor<br>A (mm) | Bolcn ili cev<br>Rivet or tube<br>B (mm) | C<br>(mm)              | C1<br>(mm) | D<br>(mm) | E<br>(mm) | M1<br>(mm) | M2<br>(mm) |                  |
| C13 18 30                       | 17 - 20                          | 20 - 30                                  | 120                    | 210        | 80        | 90        | M10        | M10        | 3,600            |
| C13 18 40                       | 17 - 20                          | 30 - 40                                  | 120                    | 215        | 80        | 90        | M12        | M10        | 3,800            |
| C13 22 30                       | 20 - 23                          | 20 - 30                                  | 130                    | 235        | 90        | 105       | M10        | M10        | 4,000            |
| C13 22 40                       | 20 - 23                          | 30 - 40                                  | 130                    | 240        | 90        | 105       | M12        | M10        | 4,200            |
| C13 25 30                       | 23 - 26                          | 20 - 30                                  | 135                    | 235        | 90        | 105       | M12        | M10        | 4,800            |
| C13 25 40                       | 23 - 26                          | 30 - 40                                  | 135                    | 240        | 90        | 105       | M12        | M10        | 5,100            |
| C13 27 30                       | 26 - 29                          | 20 - 30                                  | 145                    | 265        | 100       | 120       | M12        | M12        | 5,300            |
| C13 27 40                       | 26 - 29                          | 30 - 40                                  | 145                    | 270        | 100       | 120       | M12        | M12        | 5,600            |
| C13 30 30                       | 29 - 32                          | 20 - 30                                  | 150                    | 280        | 100       | 135       | M12        | M12        | 5,800            |
| C13 30 40                       | 29 - 32                          | 30 - 40                                  | 150                    | 285        | 100       | 135       | M12        | M12        | 6,000            |
| C13 30 50                       | 29 - 32                          | 40 - 50                                  | 150                    | 290        | 100       | 135       | M12        | M12        | 6,400            |

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

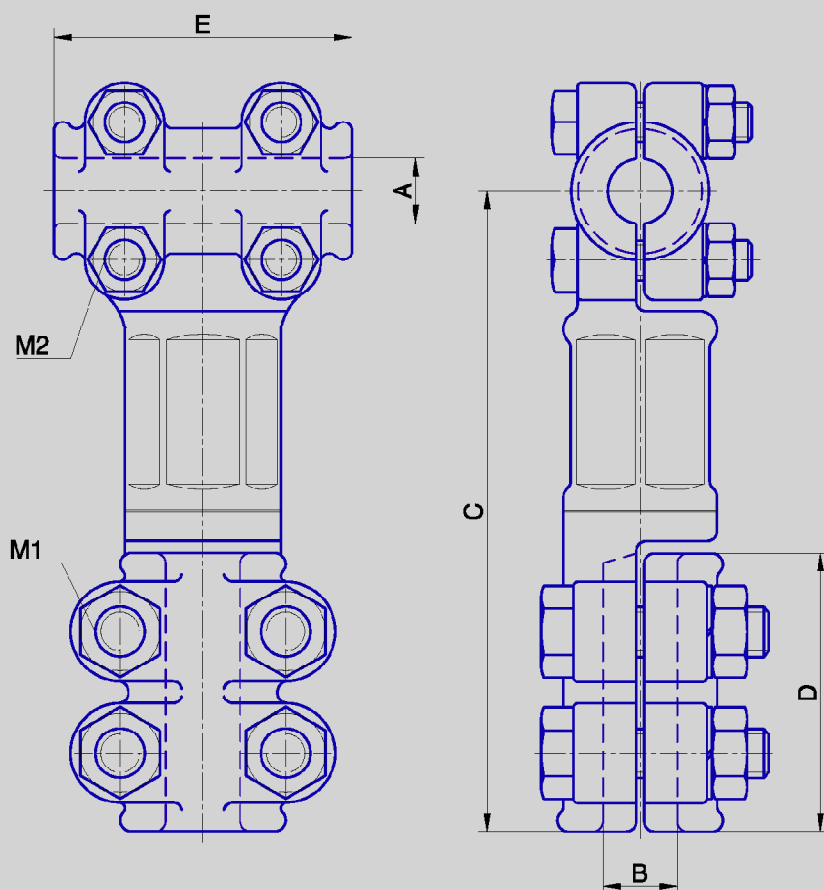

| Kataloški broj<br><i>Catalogue No.</i> | Prečnik - <i>Diameter</i>     |                                       | Dimenzije - <i>Dimensions</i> |      |      |      |      | Težina<br><i>Weight</i> |
|----------------------------------------|-------------------------------|---------------------------------------|-------------------------------|------|------|------|------|-------------------------|
|                                        | Provodnik<br><i>Conductor</i> | Bolcn ili cev<br><i>Rivet or tube</i> | C                             | D    | E    | M1   | M2   |                         |
|                                        | A (mm)                        | B (mm)                                | (mm)                          | (mm) | (mm) | (mm) | (mm) | (≈kg)                   |
| C14 6 10                               | 5 – 8                         | 5 – 10                                | 135                           | 40   | 40   | M6   | M6   | 0,900                   |
| C14 6 20                               | 5 – 8                         | 10 – 20                               | 135                           | 40   | 40   | M8   | M6   | 1,100                   |
| C14 10 10                              | 8 – 11                        | 5 – 10                                | 145                           | 50   | 50   | M6   | M6   | 1,300                   |
| C14 10 20                              | 8 – 11                        | 10 – 20                               | 145                           | 50   | 50   | M8   | M6   | 1,500                   |
| C14 12 20                              | 11 – 14                       | 10 – 20                               | 155                           | 60   | 60   | M10  | M8   | 1,900                   |
| C14 12 30                              | 11 – 14                       | 20 – 30                               | 155                           | 60   | 60   | M10  | M8   | 2,100                   |
| C14 15 20                              | 14 – 17                       | 10 – 20                               | 175                           | 70   | 70   | M10  | M10  | 2,500                   |
| C14 15 30                              | 14 – 17                       | 20 – 30                               | 185                           | 70   | 70   | M10  | M10  | 2,700                   |
| C14 18 20                              | 17 – 20                       | 10 – 20                               | 190                           | 80   | 80   | M10  | M10  | 3,100                   |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al/Fe conductor to Cu rivet or tube.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stežaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

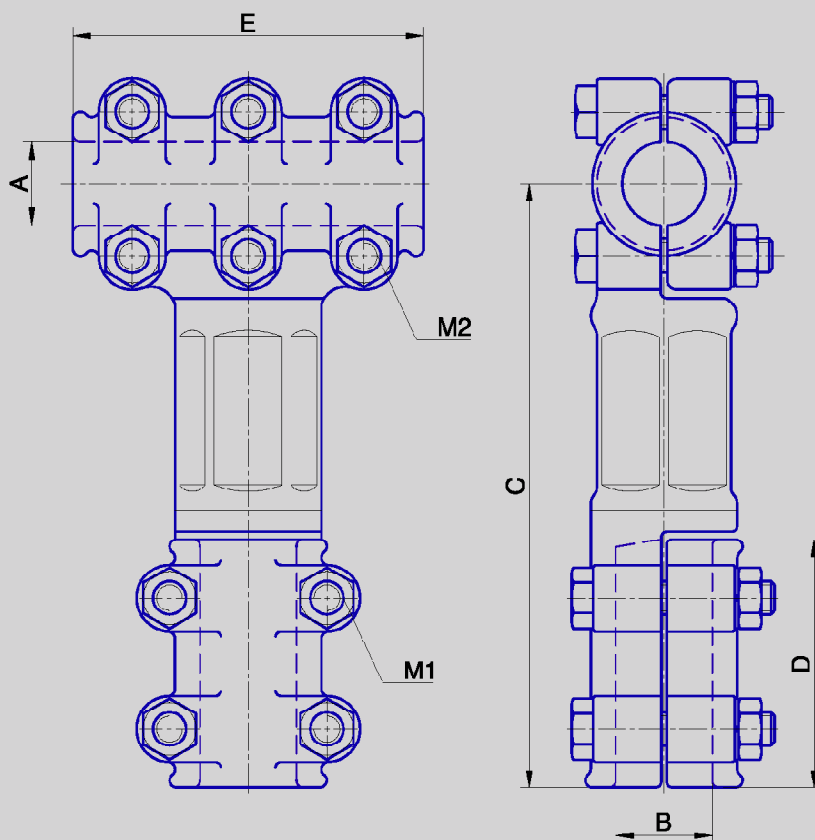

| Kataloški broj<br>Catalogue No. | Prečnik - Diameter     |                                | Dimenzije - Dimensions |      |      |      |      | Težina<br>Weight |
|---------------------------------|------------------------|--------------------------------|------------------------|------|------|------|------|------------------|
|                                 | Provodnik<br>Conductor | Bolcn ili cev<br>Rivet or tube | C                      | D    | E    | M1   | M2   |                  |
|                                 | A (mm)                 | B (mm)                         | (mm)                   | (mm) | (mm) | (mm) | (mm) | (≈kg)            |
| C14 18 30                       | 17 – 20                | 20 – 30                        | 210                    | 80   | 90   | M10  | M10  | 3,200            |
| C14 18 40                       | 17 – 20                | 30 – 40                        | 210                    | 80   | 90   | M12  | M10  | 3,400            |
| C14 22 30                       | 20 – 23                | 20 – 30                        | 230                    | 90   | 105  | M10  | M10  | 3,700            |
| C14 22 40                       | 20 – 23                | 30 – 40                        | 230                    | 90   | 105  | M12  | M10  | 3,900            |
| C14 25 30                       | 23 – 26                | 20 – 30                        | 240                    | 90   | 105  | M12  | M10  | 4,200            |
| C14 25 40                       | 23 – 26                | 30 – 40                        | 240                    | 90   | 105  | M12  | M10  | 4,400            |
| C14 27 30                       | 26 – 29                | 20 – 30                        | 260                    | 100  | 120  | M12  | M12  | 4,800            |
| C14 27 40                       | 26 – 29                | 30 – 40                        | 260                    | 100  | 120  | M12  | M12  | 5,000            |
| C14 30 30                       | 29 – 32                | 20 – 30                        | 270                    | 100  | 135  | M12  | M12  | 5,400            |
| C14 30 40                       | 29 – 32                | 30 – 40                        | 270                    | 100  | 135  | M12  | M12  | 5,700            |
| C14 30 50                       | 29 – 32                | 40 – 50                        | 270                    | 100  | 135  | M12  | M12  | 6,000            |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu bolcn ili cev.

Connectors are applied for connection of Al or Al/Fe conductor to Cu rivet or tube.


**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolna ili cevi za koje će stežaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.



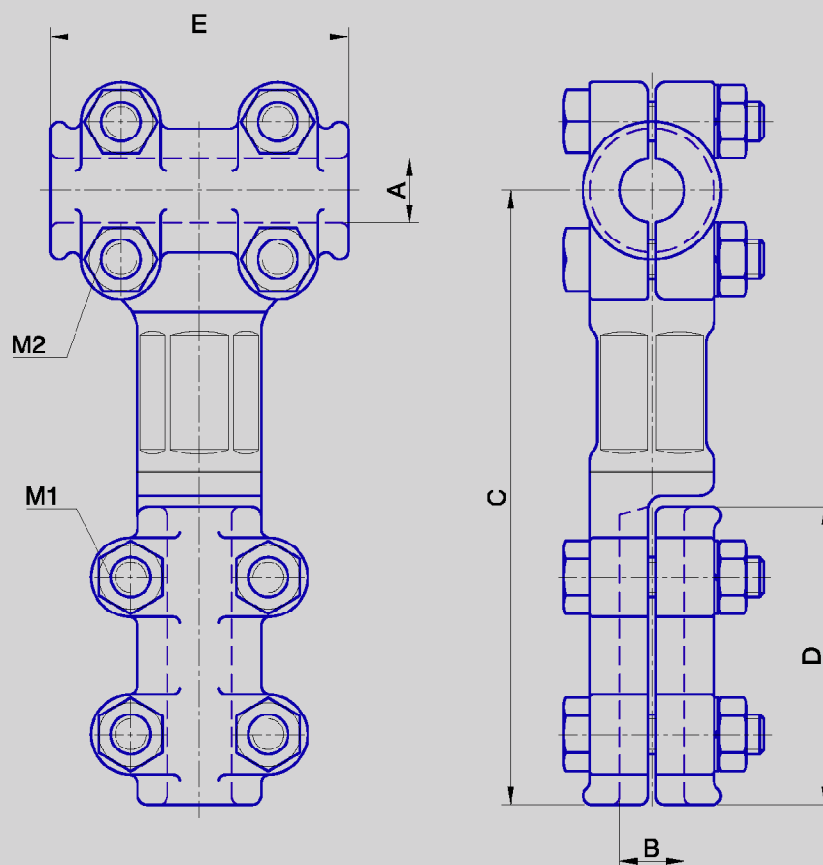

| Kataloški broj<br><i>Catalogue No.</i> | Prečnik - <i>Diameter</i>     |                               | Dimenzije - <i>Dimensions</i> |      |      |      |      | Težina<br><i>Weight</i> |
|----------------------------------------|-------------------------------|-------------------------------|-------------------------------|------|------|------|------|-------------------------|
|                                        | Provodnik<br><i>Conductor</i> | Provodnik<br><i>Conductor</i> | C                             | D    | E    | M1   | M2   |                         |
|                                        | A (mm)                        | B (mm)                        | (mm)                          | (mm) | (mm) | (mm) | (mm) | (≈kg)                   |
| C04 6 6                                | 5 – 8                         | 5 – 8                         | 135                           | 50   | 40   | M6   | M6   | 0,900                   |
| C04 6 10                               | 5 – 8                         | 8 – 11                        | 145                           | 60   | 40   | M6   | M6   | 1,100                   |
| C04 10 6                               | 8 – 11                        | 5 – 8                         | 140                           | 50   | 50   | M6   | M6   | 1,200                   |
| C04 10 10                              | 8 – 11                        | 8 – 11                        | 150                           | 60   | 50   | M6   | M6   | 1,500                   |
| C04 12 10                              | 11 – 14                       | 8 – 11                        | 155                           | 60   | 60   | M6   | M8   | 1,800                   |
| C04 12 12                              | 11 – 14                       | 11 – 14                       | 165                           | 70   | 60   | M8   | M8   | 2,000                   |
| C04 15 12                              | 14 – 17                       | 11 – 14                       | 175                           | 70   | 70   | M8   | M10  | 2,300                   |
| C04 15 15                              | 14 – 17                       | 14 – 17                       | 185                           | 80   | 70   | M10  | M10  | 2,600                   |
| C04 18 12                              | 17 – 20                       | 11 – 14                       | 180                           | 70   | 80   | M8   | M10  | 2,800                   |
| C04 18 15                              | 17 – 20                       | 14 – 17                       | 190                           | 80   | 80   | M10  | M10  | 3,000                   |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu provodnik.



Connectors are applied for connection of Al or Al/Fe conductor to Cu conductor.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors for which the connector is to be applied to.

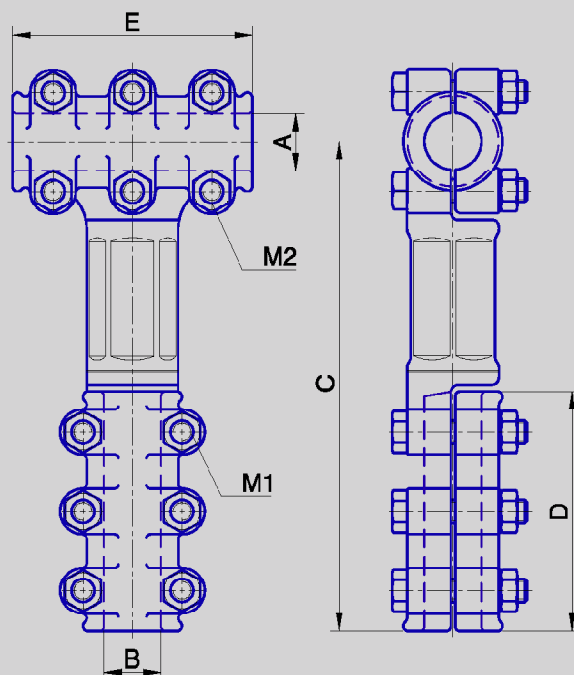

| Kataloški broj<br>Catalogue No. | Prečnik - Diameter     |                        | Dimenzije - Dimensions |      |      |      |      | Težina<br>Weight |
|---------------------------------|------------------------|------------------------|------------------------|------|------|------|------|------------------|
|                                 | Provodnik<br>Conductor | Provodnik<br>Conductor | C                      | D    | E    | M1   | M2   |                  |
|                                 | A (mm)                 | B (mm)                 | (mm)                   | (mm) | (mm) | (mm) | (mm) | (≈kg)            |
| C04 18 18                       | 17 – 20                | 17 – 20                | 220                    | 90   | 90   | M10  | M10  | 3,600            |
| C04 22 12                       | 20 – 23                | 11 – 14                | 200                    | 60   | 105  | M8   | M10  | 3,300            |
| C04 22 15                       | 20 – 23                | 14 – 17                | 220                    | 75   | 105  | M8   | M10  | 3,600            |
| C04 22 18                       | 20 – 23                | 17 – 20                | 230                    | 90   | 105  | M10  | M10  | 3,900            |
| C04 22 22                       | 20 – 23                | 20 – 23                | 250                    | 105  | 105  | M10  | M10  | 4,200            |
| C04 25 15                       | 23 – 26                | 14 – 17                | 220                    | 75   | 105  | M8   | M10  | 3,900            |
| C04 25 18                       | 23 – 26                | 17 – 20                | 240                    | 90   | 105  | M10  | M10  | 4,200            |
| C04 25 22                       | 23 – 26                | 20 – 23                | 250                    | 105  | 105  | M10  | M10  | 4,500            |
| C04 25 25                       | 23 – 26                | 23 – 26                | 250                    | 105  | 105  | M12  | M10  | 4,800            |
| C04 27 18                       | 26 – 29                | 17 – 20                | 250                    | 90   | 120  | M10  | M12  | 4,200            |
| C04 27 22                       | 26 – 29                | 20 – 23                | 270                    | 105  | 120  | M10  | M12  | 4,800            |
| C04 27 25                       | 26 – 29                | 23 – 26                | 270                    | 105  | 120  | M12  | M12  | 5,100            |
| C04 27 27                       | 26 – 29                | 26 – 29                | 280                    | 120  | 120  | M12  | M12  | 5,400            |
| C04 30 18                       | 29 – 32                | 17 – 20                | 250                    | 90   | 135  | M10  | M12  | 4,800            |
| C04 30 22                       | 29 – 32                | 20 – 23                | 270                    | 105  | 135  | M10  | M12  | 5,100            |
| C04 30 25                       | 29 – 32                | 23 – 26                | 270                    | 105  | 135  | M12  | M12  | 5,400            |
| C04 30 27                       | 29 – 32                | 26 – 29                | 280                    | 120  | 135  | M12  | M12  | 5,700            |
| C04 30 30                       | 29 – 32                | 29 – 32                | 300                    | 135  | 135  | M12  | M12  | 6,000            |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu provodnik.


Connectors are applied for connection of Al or Al/Fe conductor to Cu conductor.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors for which the connector is to be applied to.

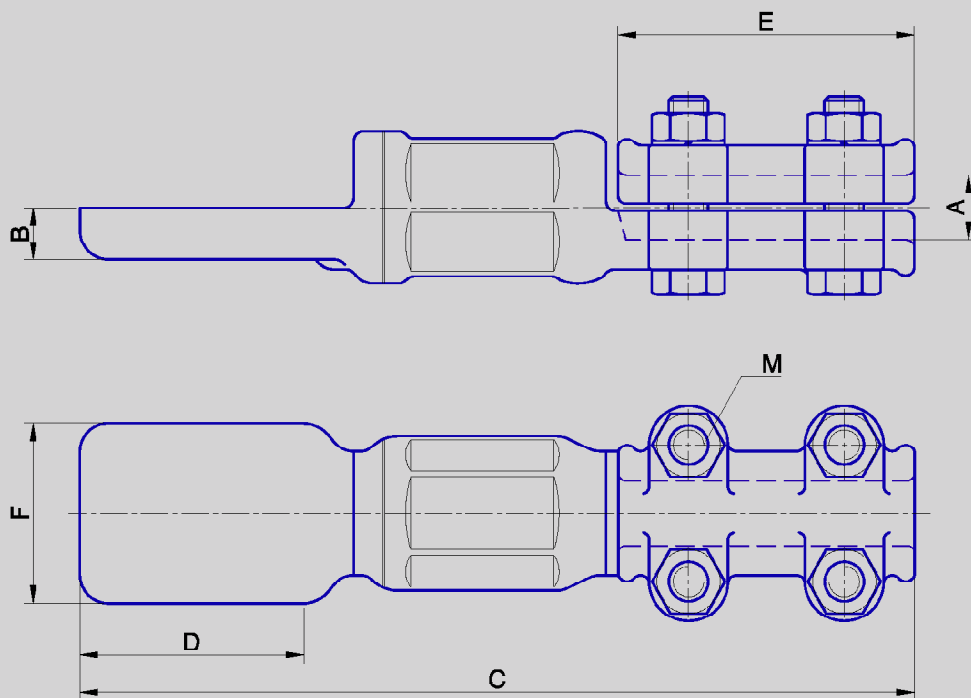

| Kataloški broj<br><i>Catalogue No.</i> | Prečnik<br>provodnika<br><i>Conductor<br/>diameter</i> | Dimenzije - <i>Dimensions</i> |      |      |      |      |      | Težina<br><i>Weight</i> |      |
|----------------------------------------|--------------------------------------------------------|-------------------------------|------|------|------|------|------|-------------------------|------|
|                                        |                                                        |                               | B    | C    | D    | E    | F    |                         | M    |
|                                        |                                                        | A (mm)                        | (mm) | (mm) | (mm) | (mm) | (mm) |                         | (mm) |
| C21 6 30                               | 5 – 8                                                  | 8                             | 120  | 30   | 40   | 25   | M6   | 0,400                   |      |
| C21 10 30                              | 8 – 11                                                 | 8                             | 130  | 30   | 50   | 30   | M6   | 0,500                   |      |
| C21 10 40                              | 8 – 11                                                 | 8                             | 150  | 40   | 50   | 30   | M6   | 0,600                   |      |
| C21 12 40                              | 11 – 14                                                | 10                            | 170  | 40   | 60   | 40   | M8   | 0,760                   |      |
| C21 12 50                              | 11 – 14                                                | 10                            | 180  | 50   | 60   | 40   | M8   | 0,900                   |      |
| C21 15 50                              | 14 – 17                                                | 10                            | 200  | 50   | 70   | 50   | M10  | 1,100                   |      |
| C21 15 60                              | 14 – 17                                                | 10                            | 210  | 60   | 70   | 50   | M10  | 1,300                   |      |
| C21 18 60                              | 17 – 20                                                | 10                            | 220  | 60   | 80   | 60   | M10  | 1,600                   |      |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

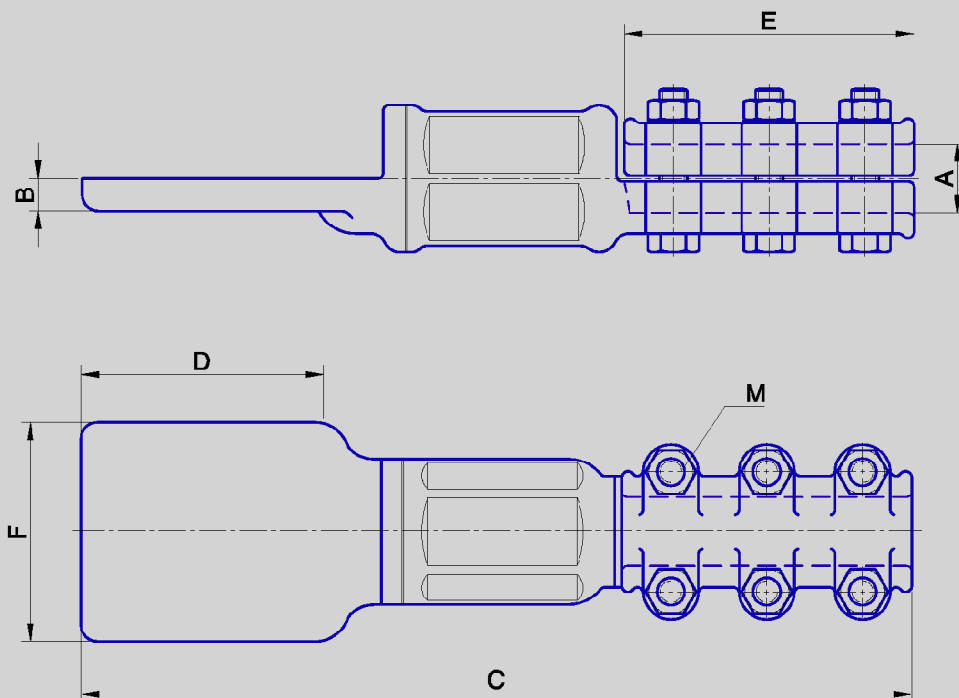

| Kataloški broj<br>Catalogue No. | Prečnik<br>provodnika<br>Conductor<br>diameter |  | Dimenzije - Dimensions |           |           |           |           |           | Težina<br>Weight |
|---------------------------------|------------------------------------------------|--|------------------------|-----------|-----------|-----------|-----------|-----------|------------------|
|                                 | A (mm)                                         |  | B<br>(mm)              | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) | M<br>(mm) |                  |
| C21 18 70                       | 17 – 20                                        |  | 12                     | 250       | 70        | 90        | 60        | M10       | 2,600            |
| C21 22 70                       | 20 – 23                                        |  | 12                     | 265       | 70        | 105       | 70        | M10       | 2,800            |
| C21 22 80                       | 20 – 23                                        |  | 12                     | 285       | 80        | 105       | 70        | M10       | 3,000            |
| C21 25 80                       | 23 – 26                                        |  | 12                     | 285       | 80        | 105       | 80        | M10       | 3,200            |
| C21 25 90                       | 23 – 26                                        |  | 12                     | 295       | 90        | 105       | 80        | M10       | 3,400            |
| C21 27 90                       | 26 – 29                                        |  | 15                     | 310       | 90        | 120       | 90        | M12       | 3,600            |
| C21 27 100                      | 26 – 29                                        |  | 15                     | 330       | 100       | 120       | 90        | M12       | 3,800            |
| C21 30 100                      | 29 – 32                                        |  | 15                     | 345       | 100       | 135       | 100       | M12       | 4,000            |
| C21 30 110                      | 29 – 32                                        |  | 18                     | 355       | 110       | 135       | 100       | M12       | 4,300            |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.


Connectors are applied for connection of AL or Al/Fe conductor to Cu plate.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

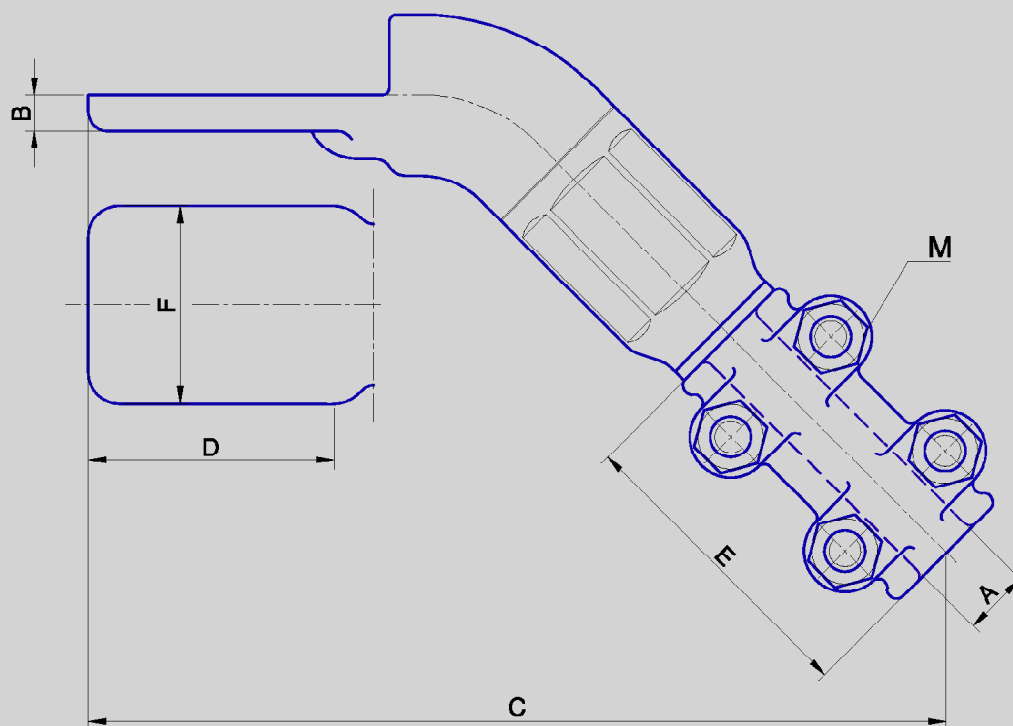

| Kataloški broj<br>Catalogue No. | Prečnik<br>provodnika<br>Conductor<br>diameter<br>A (mm) | Dimenzije - Dimensions |           |           |           |           |           | Težina<br>Weight<br>(≈kg) |
|---------------------------------|----------------------------------------------------------|------------------------|-----------|-----------|-----------|-----------|-----------|---------------------------|
|                                 |                                                          | B<br>(mm)              | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) | M<br>(mm) |                           |
| C22 6 30                        | 5 – 8                                                    | 8                      | 120       | 30        | 40        | 25        | M6        | 0,400                     |
| C22 10 30                       | 8 – 11                                                   | 8                      | 130       | 30        | 50        | 30        | M6        | 0,500                     |
| C22 10 40                       | 8 – 11                                                   | 8                      | 145       | 40        | 50        | 30        | M6        | 0,600                     |
| C22 12 40                       | 11 – 14                                                  | 10                     | 155       | 40        | 60        | 40        | M8        | 0,760                     |
| C22 12 50                       | 11 – 14                                                  | 10                     | 175       | 50        | 60        | 40        | M8        | 0,900                     |
| C22 15 50                       | 14 – 17                                                  | 10                     | 185       | 50        | 70        | 50        | M10       | 1,100                     |
| C22 15 60                       | 14 – 17                                                  | 10                     | 200       | 60        | 70        | 50        | M10       | 1,300                     |
| C22 18 60                       | 17 – 20                                                  | 10                     | 210       | 60        | 80        | 60        | M10       | 1,600                     |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

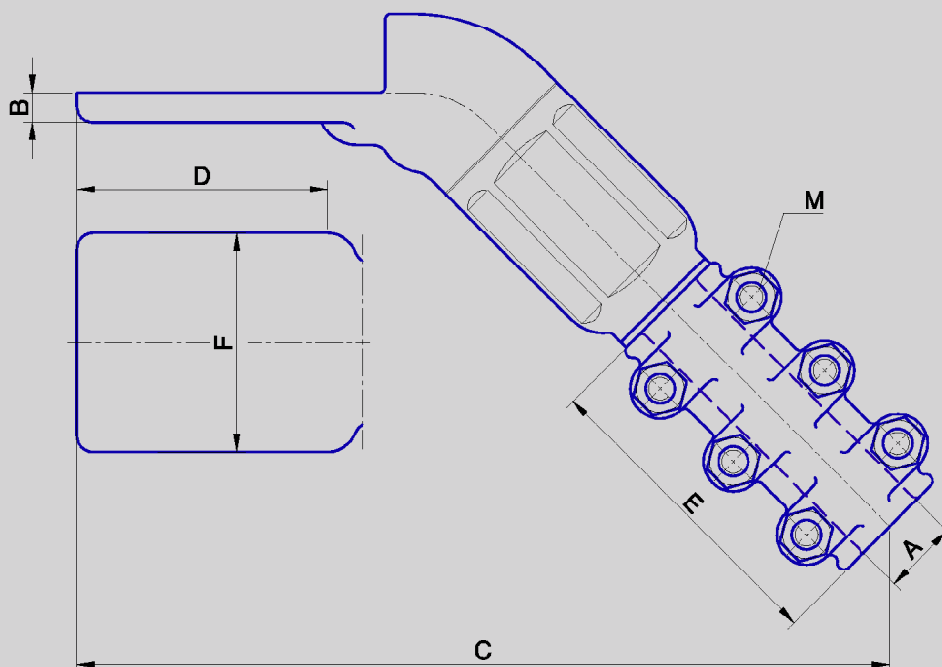

| Kataloški broj<br>Catalogue No. | Prečnik<br>provodnika<br>Conductor<br>diameter |  | Dimenzije - Dimensions |           |           |           |           |           | Težina<br>Weight |
|---------------------------------|------------------------------------------------|--|------------------------|-----------|-----------|-----------|-----------|-----------|------------------|
|                                 | A (mm)                                         |  | B<br>(mm)              | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) | M<br>(mm) |                  |
| C22 18 70                       | 17 – 20                                        |  | 12                     | 235       | 70        | 90        | 60        | M10       | 2,650            |
| C22 22 70                       | 20 – 23                                        |  | 12                     | 250       | 70        | 105       | 70        | M10       | 2,850            |
| C22 22 80                       | 20 – 23                                        |  | 12                     | 260       | 80        | 105       | 70        | M10       | 3,050            |
| C22 25 80                       | 23 – 26                                        |  | 12                     | 265       | 80        | 105       | 80        | M12       | 3,250            |
| C22 25 90                       | 23 – 26                                        |  | 12                     | 270       | 90        | 105       | 80        | M10       | 3,450            |
| C22 27 90                       | 26 – 29                                        |  | 15                     | 290       | 90        | 120       | 90        | M12       | 3,650            |
| C22 27 100                      | 26 – 29                                        |  | 15                     | 300       | 100       | 120       | 90        | M12       | 3,850            |
| C22 30 100                      | 29 – 32                                        |  | 15                     | 320       | 100       | 135       | 100       | M12       | 4,050            |
| C22 30 110                      | 29 – 32                                        |  | 18                     | 335       | 110       | 135       | 100       | M12       | 4,350            |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

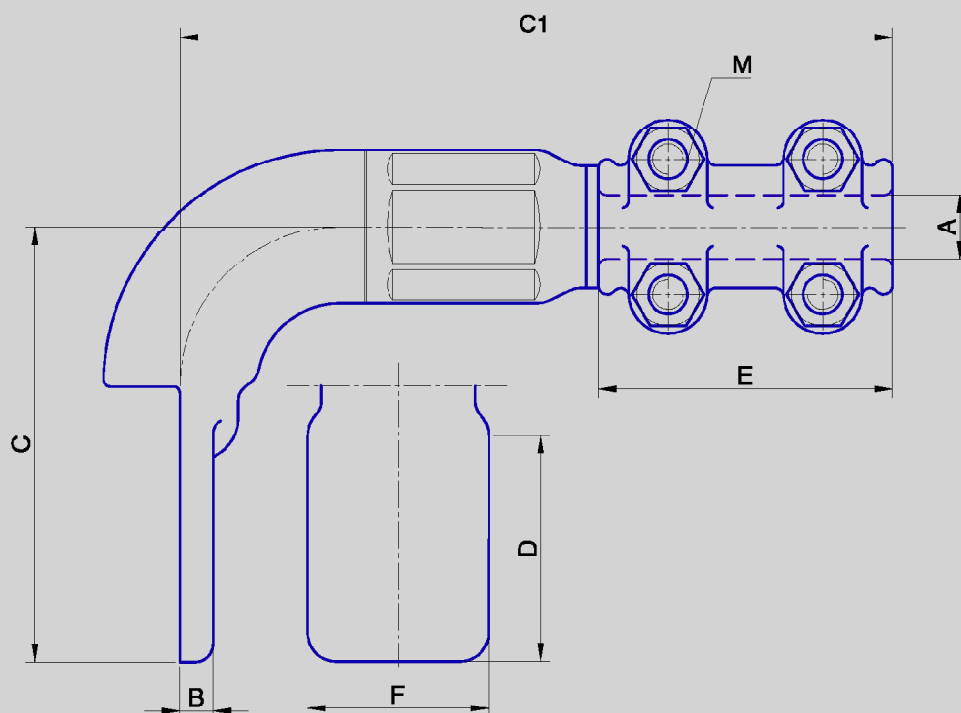

| Kataloški broj<br>Catalogue No. | Prečnik<br>provodnika<br>Conductor<br>diameter | Dimenzije - Dimensions |        |        |         |        |        |        | Težina<br>Weight |
|---------------------------------|------------------------------------------------|------------------------|--------|--------|---------|--------|--------|--------|------------------|
|                                 |                                                | A (mm)                 | B (mm) | C (mm) | C1 (mm) | D (mm) | E (mm) | F (mm) |                  |
| C23 6 30                        | 5 – 8                                          |                        | 8      | 70     | 140     | 30     | 40     | 25     | M6 0,460         |
| C23 10 30                       | 8 – 11                                         |                        | 8      | 70     | 150     | 30     | 50     | 30     | M6 0,560         |
| C23 10 40                       | 8 – 11                                         |                        | 8      | 80     | 150     | 40     | 50     | 30     | M6 0,660         |
| C23 12 40                       | 11 – 14                                        |                        | 10     | 80     | 160     | 40     | 60     | 40     | M8 0,800         |
| C23 12 50                       | 11 – 14                                        |                        | 10     | 90     | 160     | 50     | 60     | 40     | M8 0,960         |
| C23 15 50                       | 14 – 17                                        |                        | 10     | 90     | 170     | 50     | 70     | 50     | M10 1,160        |
| C23 15 60                       | 14 – 17                                        |                        | 10     | 100    | 170     | 60     | 70     | 50     | M10 1,400        |
| C23 18 60                       | 17 – 20                                        |                        | 10     | 100    | 180     | 60     | 80     | 60     | M10 1,660        |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

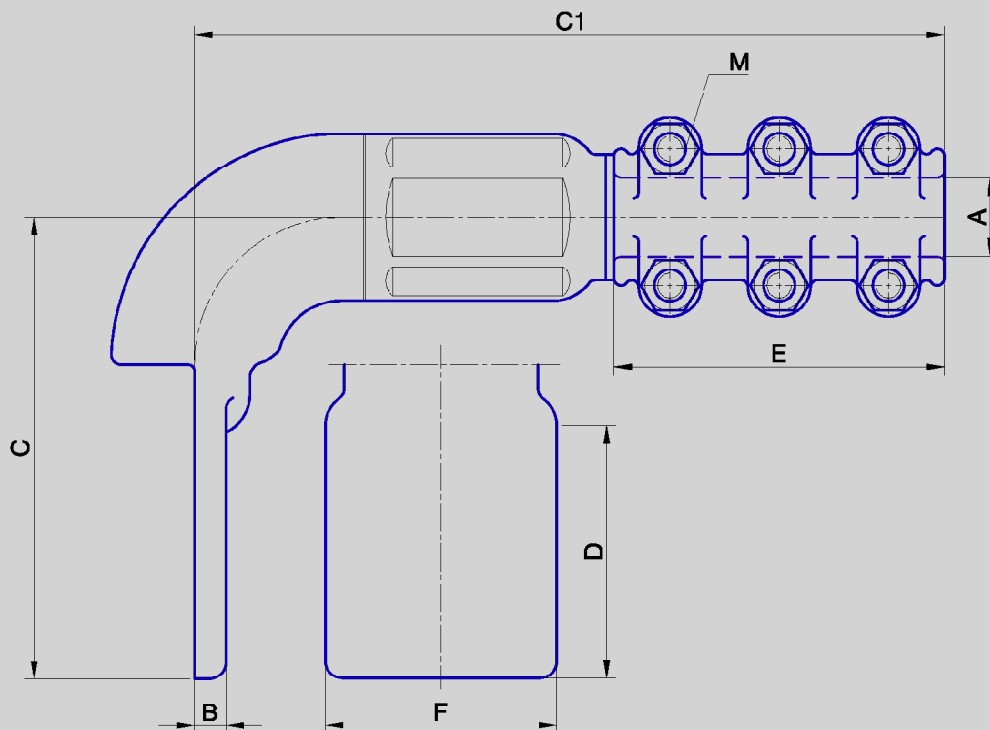

| Kataloški broj<br><i>Catalogue No.</i> | Prečnik<br>provodnika<br><i>Conductor<br/>diameter</i> | Dimenzije - <i>Dimensions</i> |      |      |      |      |      |      |       | Težina<br><i>Weight</i> |
|----------------------------------------|--------------------------------------------------------|-------------------------------|------|------|------|------|------|------|-------|-------------------------|
|                                        |                                                        | B                             | C    | C1   | D    | E    | F    | M    |       |                         |
|                                        |                                                        | A (mm)                        | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (≈kg) |                         |
| C23 18 70                              | 17 – 20                                                | 12                            | 110  | 215  | 70   | 90   | 60   | M10  | 2,700 |                         |
| C23 22 30                              | 20 – 23                                                | 12                            | 110  | 240  | 70   | 105  | 70   | M10  | 2,900 |                         |
| C23 22 80                              | 20 – 23                                                | 12                            | 120  | 240  | 80   | 105  | 70   | M10  | 3,100 |                         |
| C23 25 80                              | 23 - 26                                                | 12                            | 120  | 240  | 80   | 105  | 80   | M10  | 3,300 |                         |
| C23 25 90                              | 23 – 26                                                | 12                            | 130  | 240  | 90   | 105  | 80   | M10  | 3,500 |                         |
| C23 27 90                              | 26 – 29                                                | 15                            | 130  | 265  | 90   | 120  | 90   | M12  | 3,720 |                         |
| C23 27 100                             | 26 – 29                                                | 15                            | 140  | 265  | 100  | 120  | 90   | M12  | 3,920 |                         |
| C23 30 100                             | 29 – 32                                                | 15                            | 140  | 285  | 100  | 135  | 100  | M12  | 4,160 |                         |
| C23 30 110                             | 29 – 32                                                | 18                            | 150  | 285  | 110  | 135  | 100  | M12  | 4,440 |                         |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.

Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.


**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.



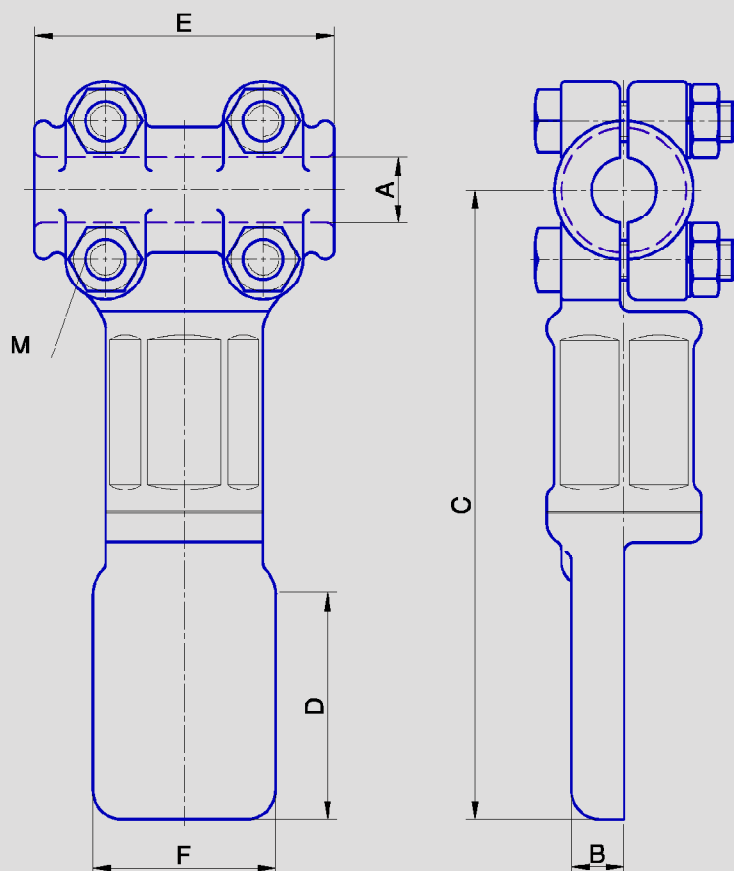

| Kataloški broj<br>Catalogue No. | Prečnik<br>provodnika<br>Conductor<br>diameter | Dimenzije - Dimensions |        |        |        |        |        | Težina<br>Weight |
|---------------------------------|------------------------------------------------|------------------------|--------|--------|--------|--------|--------|------------------|
|                                 |                                                | A (mm)                 | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |                  |
| C24 6 30                        | 5 – 8                                          |                        | 8      | 140    | 30     | 40     | 25     | M6 0,400         |
| C24 10 30                       | 8 – 11                                         |                        | 8      | 140    | 30     | 50     | 30     | M6 0,500         |
| C24 10 40                       | 8 – 11                                         |                        | 8      | 150    | 40     | 50     | 30     | M6 0,600         |
| C24 12 40                       | 11 – 14                                        |                        | 10     | 150    | 40     | 60     | 40     | M8 0,760         |
| C24 12 50                       | 11 – 14                                        |                        | 10     | 165    | 50     | 60     | 40     | M8 0,900         |
| C24 15 50                       | 14 – 17                                        |                        | 10     | 165    | 50     | 70     | 50     | M10 1,100        |
| C24 15 60                       | 14 – 17                                        |                        | 10     | 180    | 60     | 70     | 50     | M10 1,300        |
| C24 18 60                       | 17 – 20                                        |                        | 10     | 180    | 60     | 80     | 60     | M10 1,600        |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.

**NAPOMENA:**

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

**NOTE:**

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.

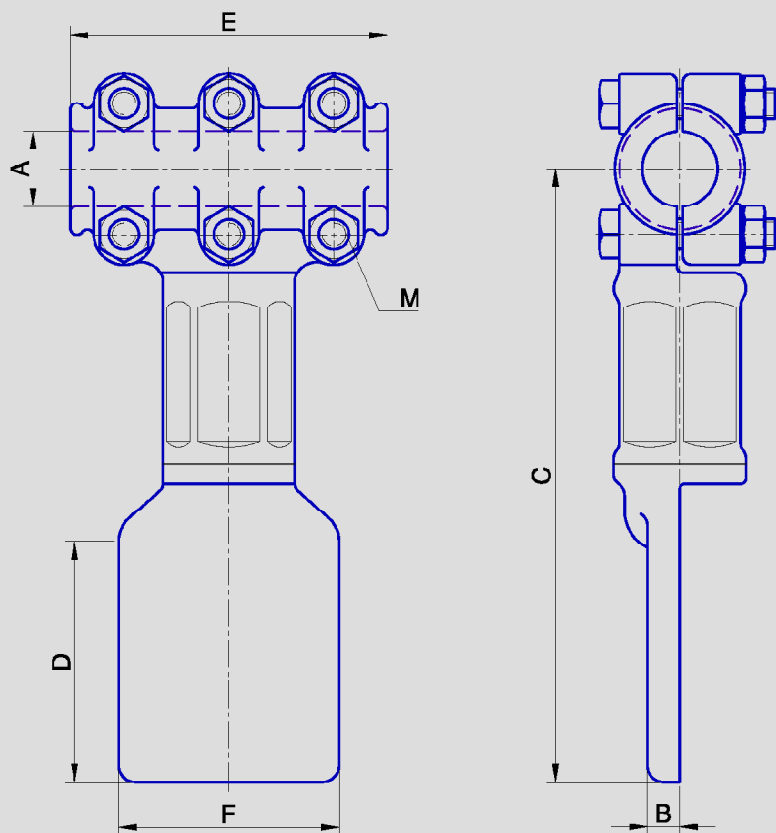

| Kataloški broj<br>Catalogue No. | Prečnik<br>provodnika<br>Conductor<br>diameter |  | Dimenzije - Dimensions |           |           |           |           |           | Težina<br>Weight |
|---------------------------------|------------------------------------------------|--|------------------------|-----------|-----------|-----------|-----------|-----------|------------------|
|                                 | A (mm)                                         |  | B<br>(mm)              | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) | M<br>(mm) |                  |
| C24 18 70                       | 17 - 20                                        |  | 12                     | 210       | 70        | 90        | 60        | M10       | 2,800            |
| C24 22 70                       | 20 - 23                                        |  | 12                     | 210       | 70        | 105       | 70        | M10       | 3,000            |
| C24 22 80                       | 20 - 23                                        |  | 12                     | 230       | 80        | 105       | 70        | M10       | 3,200            |
| C24 25 80                       | 23 - 26                                        |  | 12                     | 230       | 80        | 105       | 80        | M10       | 3,400            |
| C24 25 90                       | 23 - 26                                        |  | 12                     | 240       | 90        | 105       | 80        | M10       | 3,600            |
| C24 27 90                       | 26 - 29                                        |  | 15                     | 240       | 90        | 120       | 90        | M12       | 3,840            |
| C24 27 100                      | 26 - 29                                        |  | 15                     | 250       | 100       | 120       | 90        | M12       | 4,040            |
| C24 30 100                      | 29 - 32                                        |  | 15                     | 250       | 100       | 135       | 100       | M12       | 4,300            |
| C24 30 110                      | 29 - 32                                        |  | 18                     | 260       | 110       | 135       | 100       | M12       | 4,600            |

Stežaljke su namenjene za spoj Al ili Al/Fe provodnika na Cu ploču.

Connectors are applied for connection of Al or Al/Fe conductor to Cu plate.

#### NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

#### NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.