


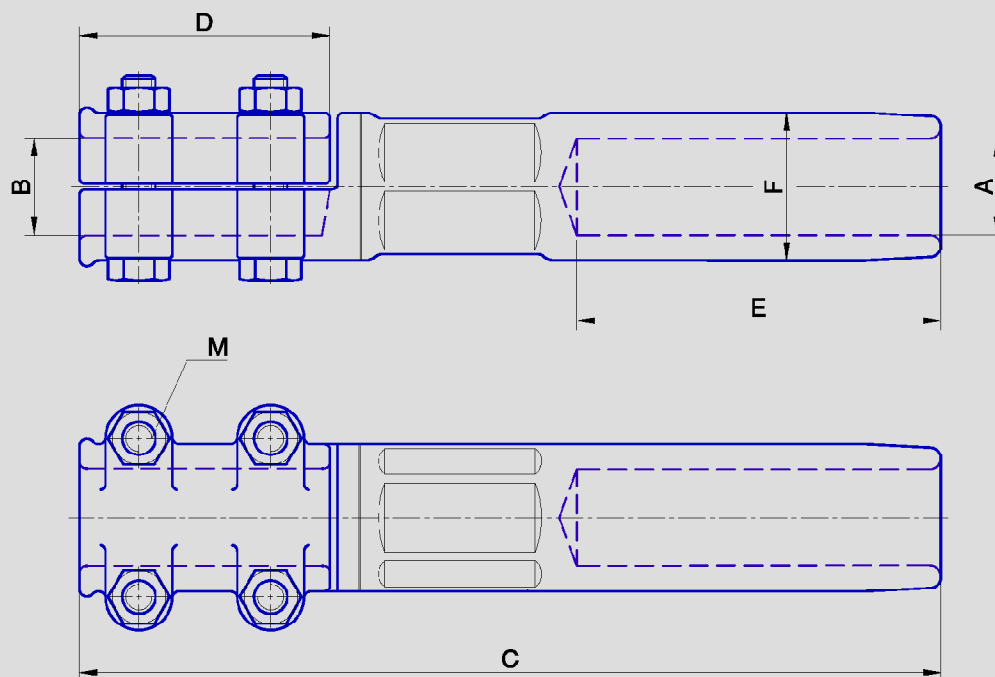

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	D	E	F	M	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
CK11 18 30	17 – 20	20 – 30	285	80	125	34	M10	3,000
CK11 18 40	17 – 20	30 – 40	285	80	125	34	M12	3,150
CK11 22 30	20 – 23	20 – 30	305	90	125	38	M10	3,250
CK11 22 40	20 – 23	30 – 40	305	90	125	38	M12	3,400
CK11 25 30	23 – 26	20 – 30	310	90	130	42	M12	3,600
CK11 25 40	23 – 26	30 – 40	310	90	130	42	M12	3,800
CK11 27 30	26 – 29	20 – 30	330	100	130	46	M12	4,000
CK11 27 40	26 – 29	30 – 40	330	100	130	46	M12	4,250
CK11 30 30	29 – 32	20 – 30	330	100	130	50	M12	4,500
CK11 30 40	29 – 32	30 – 40	330	100	130	50	M12	4,750
CK11 30 50	29 – 32	40 – 50	330	100	130	50	M12	5,000

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

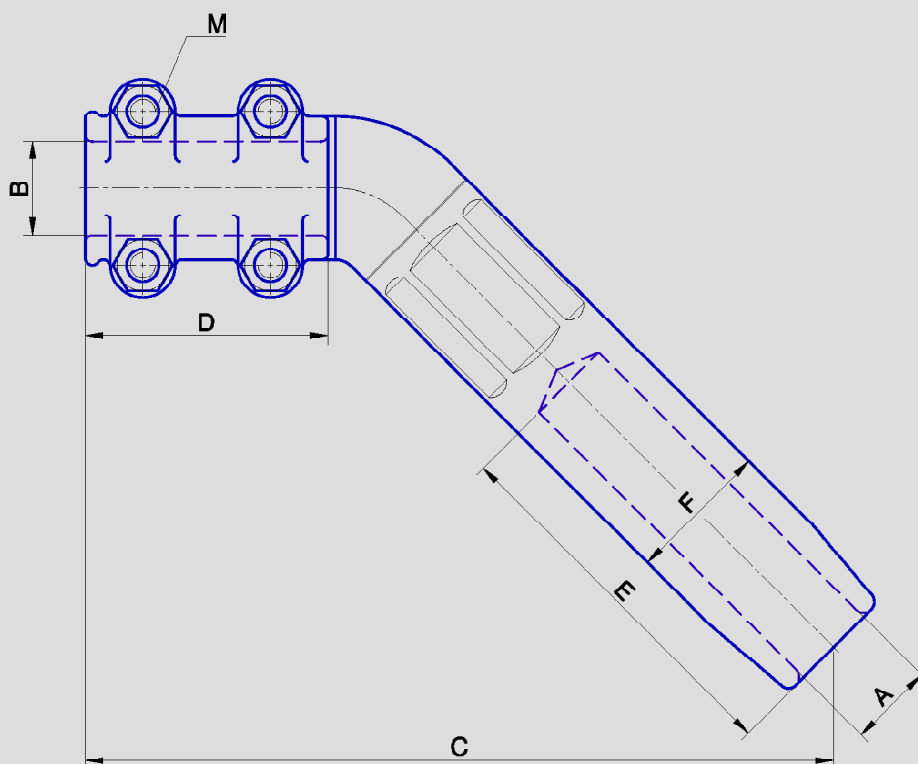

Kataloški broj <i>Catalogue No.</i>	Prečnik - <i>Diameter</i>		Dimenzije - <i>Dimensions</i>					Težina <i>Weight</i>
	Provodnik <i>Conductor</i>	Bolcn ili cev <i>Rivet or tube</i>	C	D	E	F	M	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
CK12 18 30	17 – 20	20 – 30	260	80	125	34	M10	3,100
CK12 18 40	17 – 20	30 – 40	265	80	125	34	M12	3,250
CK12 22 30	20 – 23	20 – 30	270	90	125	38	M10	3,350
CK12 22 40	20 – 23	30 – 40	275	90	125	38	M12	3,500
CK12 25 30	23 – 26	20 – 30	280	90	130	42	M12	3,700
CK12 25 40	23 – 26	30 – 40	285	90	130	42	M12	3,900
CK12 27 30	26 – 29	20 – 30	295	100	130	46	M12	4,100
CK12 27 40	26 – 29	30 – 40	300	100	130	46	M12	4,350
CK12 30 30	29 – 32	20 – 30	305	100	130	50	M12	4,600
CK12 30 40	29 – 32	30 – 40	310	100	130	50	M12	4,850
CK12 30 50	29 – 32	40 – 50	315	100	130	50	M12	5,100

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stežaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

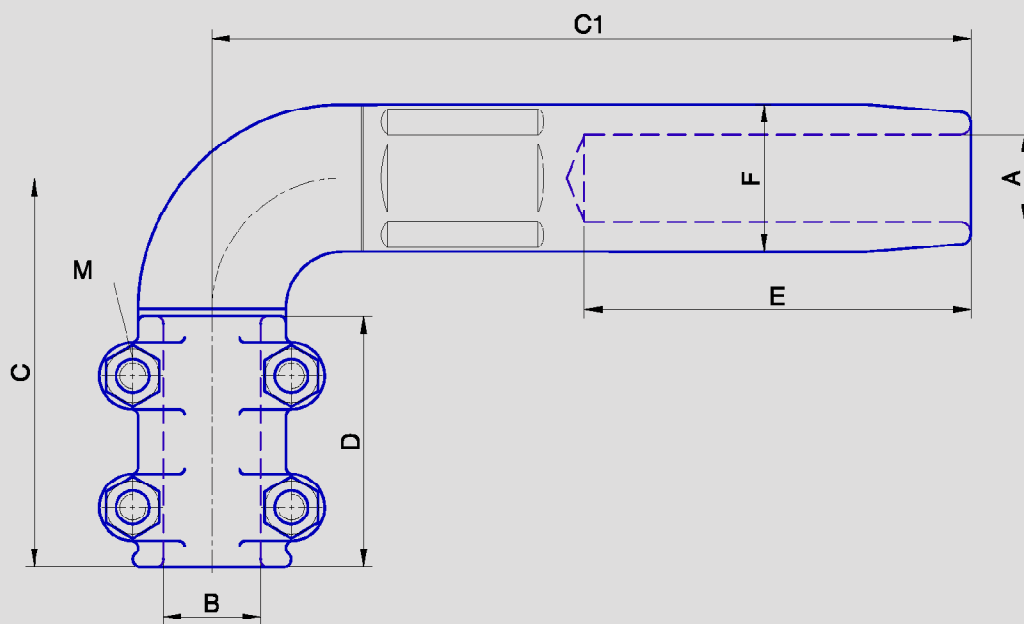

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions						Težina Weight
	Provodnik Conductor	Bolcn ili cev Rivet or tube	C	C1	D	E	F	M	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
CK13 18 30	17 – 20	20 – 30	120	245	80	125	34	M10	3,200
CK13 18 40	17 – 20	30 – 40	120	250	80	125	34	M12	3,350
CK13 22 30	20 – 23	20 – 30	130	250	90	125	38	M10	3,450
CK13 22 40	20 – 23	30 – 40	130	255	90	125	38	M12	3,600
CK13 25 30	23 – 26	20 – 30	135	260	90	130	42	M12	3,800
CK13 25 40	23 – 26	30 – 40	135	265	90	130	42	M12	4,000
CK13 27 30	26 – 29	20 – 30	145	265	100	130	46	M12	4,200
CK13 27 40	26 – 29	30 – 40	145	270	100	130	46	M12	4,450
CK13 30 30	29 – 32	20 – 30	150	270	100	130	50	M12	4,700
CK13 30 40	29 – 32	30 – 40	150	275	100	130	50	M12	4,950
CK13 30 50	29 – 32	40 – 50	150	280	100	130	50	M12	5,200

Stezaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu bolcn ili cev.


Connectors are applied for connection of Al or Al-Fe conductor to Cu rivet or tube.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i bolcna ili cevi za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and rivet or tube for which the connector is to be applied to.

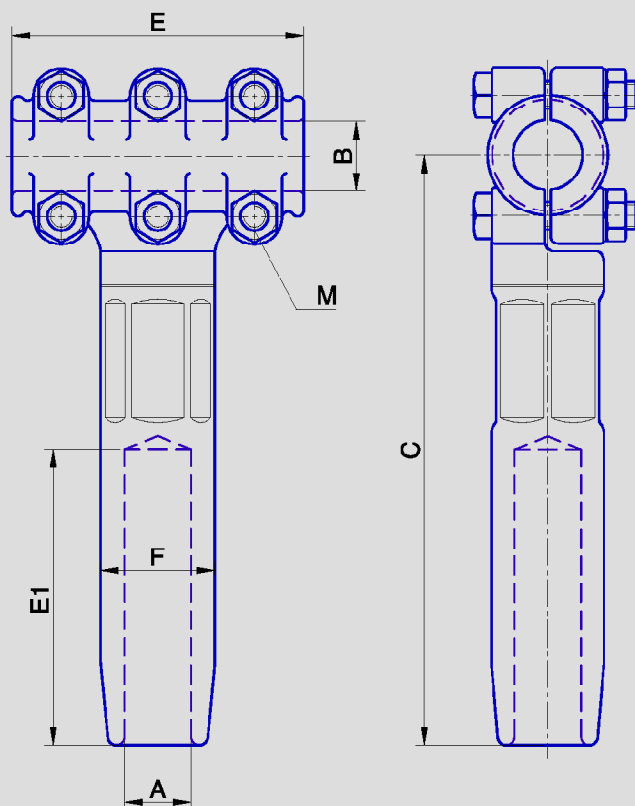

Kataloški broj Catalogue No.	Prečnik - Diameter		Dimenzije - Dimensions					Težina Weight
	Provodnik Conductor	Provodnik Conductor	C	E1	E	F	M	
	A (mm)	B (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(≈kg)
CK04 18 15	17 – 20	14 – 17	255	125	80	34	M10	3,100
CK04 18 18	17 – 20	17 – 20	255	125	90	34	M10	3,250
CK04 22 18	20 – 23	17 – 20	265	125	90	38	M10	3,350
CK04 22 22	20 – 23	20 – 23	265	125	90	38	M10	3,500
CK04 25 22	23 – 26	20 – 23	280	130	90	42	M10	3,700
CK04 25 25	23 – 26	23 – 26	280	130	105	42	M10	3,900
CK04 27 25	26 – 29	23 – 26	290	130	105	46	M12	4,100
CK04 27 27	26 – 29	26 – 29	290	130	120	46	M12	4,350
CK04 30 25	29 – 32	23 – 26	300	130	105	50	M12	4,600
CK04 30 27	29 – 32	26 – 29	300	130	120	50	M12	4,850
CK04 30 30	29 – 32	29 – 32	300	130	130	50	M12	5,100

Stežaljke su namenjene za spoj Cu provodnika na Al provodnik.


Connectors are applied for connection of Cu conductor to Al conductor.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductors for which the connector is to be applied to.

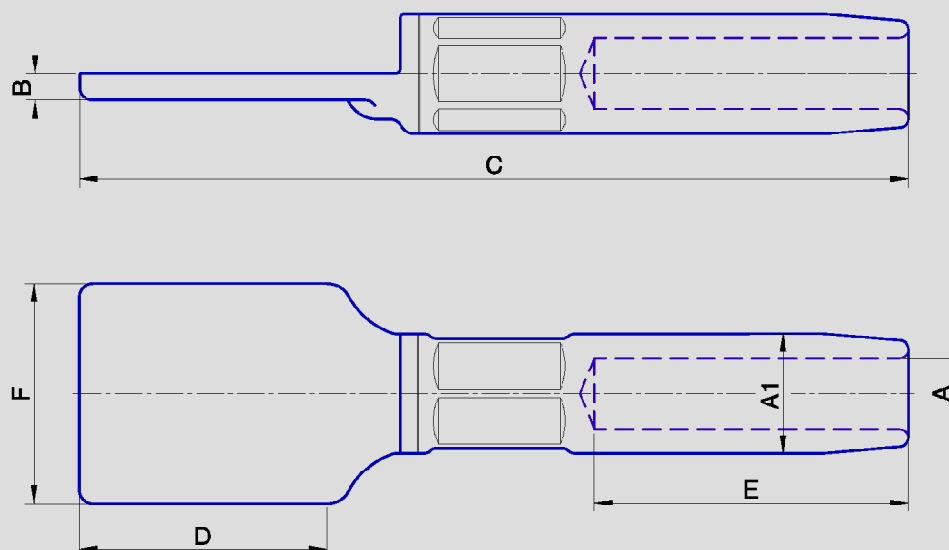

Kataloški broj Catalogue No.	Prečnik provodnika Conductor Diameter		Dimenzije - Dimensions						Težina Weight (≈kg)
	A (mm)		A1 (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	
CK21 18 70	17 – 20		34	10	275	70	125	60	2,200
CK21 22 70	17 – 20		38	10	285	70	125	70	2,300
CK21 22 80	20 – 23		38	10	295	80	125	70	2,450
CK21 25 80	20 – 23		42	12	300	80	130	80	2,650
CK21 25 90	23 – 26		42	12	310	90	130	80	2,850
CK21 27 90	23 – 26		46	14	320	90	130	90	3,050
CK21 27 100	26 – 29		46	14	330	100	130	90	3,300
CK21 30 100	26 – 29		50	16	330	100	130	100	3,550
CK21 30 110	29 – 32		50	16	340	110	130	100	3,900

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Cu plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor for which the connector is to be applied to.

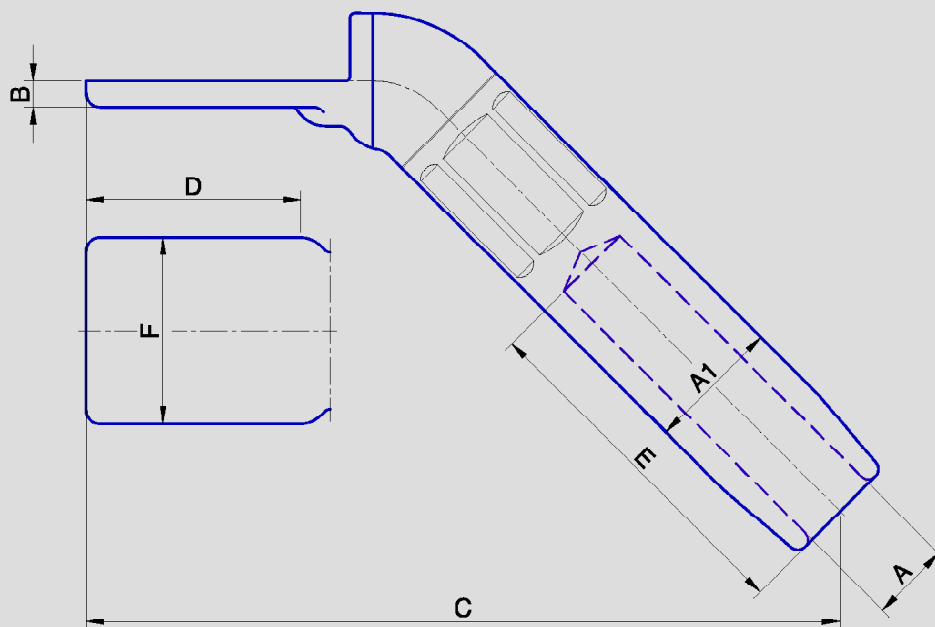

Kataloški broj Catalogue No.	Prečnik provodnika Conductor diameter		Dimenzije - Dimensions						Težina Weight
	A (mm)		A1 (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	
CK22 18 70	17 – 20		34	10	250	70	125	60	2,250
CK22 22 70	20 – 23		38	10	255	70	125	70	2,350
CK22 22 80	20 – 23		38	10	265	80	125	70	2,500
CK22 25 80	23 – 26		42	12	270	80	130	80	2,700
CK22 25 90	23 – 26		42	12	280	90	130	80	2,900
CK22 27 90	26 – 29		46	14	285	90	130	90	3,100
CK22 27 100	26 – 29		46	14	305	100	130	90	3,350
CK22 30 100	29 – 32		50	16	310	100	130	100	3,600
CK22 30 110	29 – 32		50	16	320	110	130	100	3,950

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu ploču.


Connectors are applied for connection of Al or Al-Fe conductor to Cu plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor for which the connector is to be applied to.

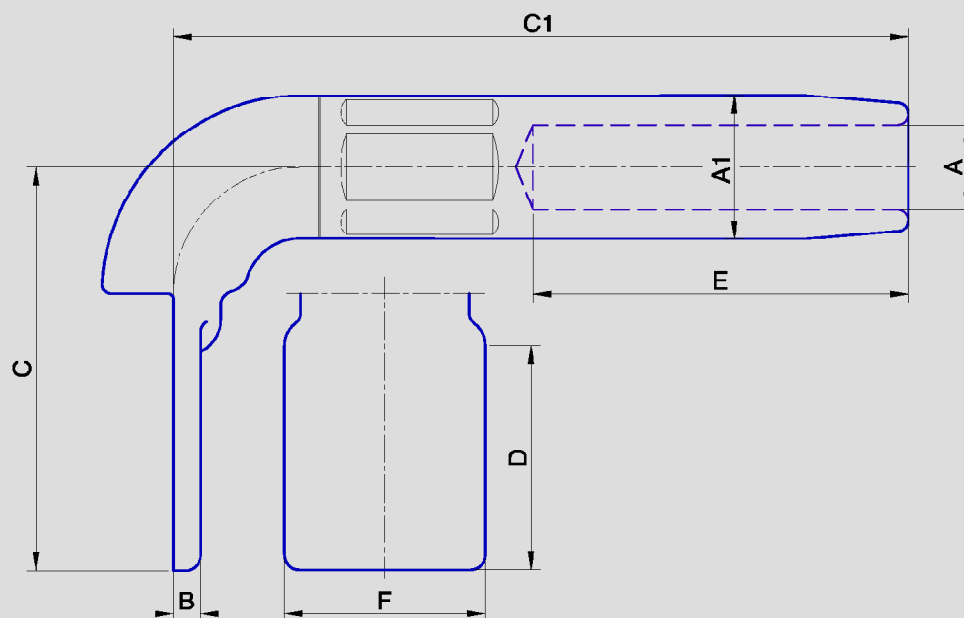

Kataloški broj <i>Catalogue No.</i>	Prečnik provodnika <i>Conductor diameter</i>	Dimenzije - <i>Dimensions</i>								Težina <i>Weight</i>
		A1	B	C	C1	D	E	F		
		A (mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
CK23 18 70	17 – 20	34	10	110	245	70	125	60	2,300	
CK23 22 70	20 – 23	38	10	110	250	70	125	70	2,400	
CK23 22 80	20 – 23	38	10	120	250	80	125	70	2,550	
CK23 25 80	23 – 26	42	12	125	260	80	130	80	2,750	
CK23 25 90	23 – 26	42	12	135	265	90	130	80	2,950	
CK23 27 90	26 – 29	46	14	135	270	90	130	90	3,150	
CK23 27 100	26 – 29	46	14	145	270	100	130	90	3,400	
CK23 30 100	29 – 32	50	16	150	275	100	130	100	3,650	
CK23 30 110	29 – 32	50	16	160	275	110	130	100	4,000	

Stežaljke su namenjene za spoj Al ili Al-Fe provodnika na Cu ploču.

Connectors are applied for connection of Al or Al-Fe conductor to Cu plate.

NAPOMENA:

Kod narudžbine je potrebno pored kataloškog broja navesti vrstu i tačne dimenzije provodnika i ploče za koje će stezaljka biti namenjena.

NOTE:

In the order, besides the catalogue number, indicate the type and exact dimensions of conductor and plate for which the connector is to be applied to.